


This document must not be copied without our consent, nor must its contents be made known to others or otherwise unauthorizedly used. All data subject to change without notice. Century Corporation

이 도면은 주식회사 센추리의 지적 재산이므로
사전 허가없이 유통하거나 복사할 수 없습니다.

2	2	2	2	08	HIGH PRESSURE GAUGE	ASS'Y		-0.1~4.0 MPaG				D	C	B	A	MARK	REVISION RECORD				DATE	REVISED	CHKED	APPD.
2	2	2	2	09	LOW PRESSURE GAUGE	ASS'Y		-0.1~2.0 MPaG				SR-A120L(P)B3	SR-A120G(F)B3	SR-A100L(P)B3	SR-A100G(F)B3	△								
2	2	2	2	10	FILTER DRIER	ASS'Y		7/8"			△													
2	2	2	2	11	CHECK VALVE	ASS'Y		2-1/8"			△													
1	1	1	1	12	INSULATION	EVA.FOAM		t20			△													
1	1	1	1	13	INSULATION	EVA.FOAM		t40			△													
2	2	2	2	14	COMP. DISCHARGE VALVE	ASS'Y		2-1/8"				Q'TY.	Q'TY.	Q'TY.	Q'TY.	PARTS NO.	PARTS NAME	MATERIAL	TREAT.	DIMENSION		WEIGHT		
																						MTL.	FINED.	
											2	2	2	2	01	COMPRESSOR	ASS'Y		SEMI-HERMETIC TYPE					
											1	1	1	1	02	EVAPORATOR	ASS'Y		SHELL & TUBE TYPE					
											1	1	1	1	03	CONTROL BOX	ASS'Y		2 C/S					
											2	2	2	2	04	EXPANSION VALVE	ASS'Y		THERMOSTATIC TYPE					
											2	2	2	2	05	SOLENOID VALVE	ASS'Y		7/8"					
											2	2	2	2	06	SIGHT GLASS	ASS'Y		3/8"					
											2	2	2	2	07	SOL V/V(For Liquid Inj.)	ASS'Y		3/8"					

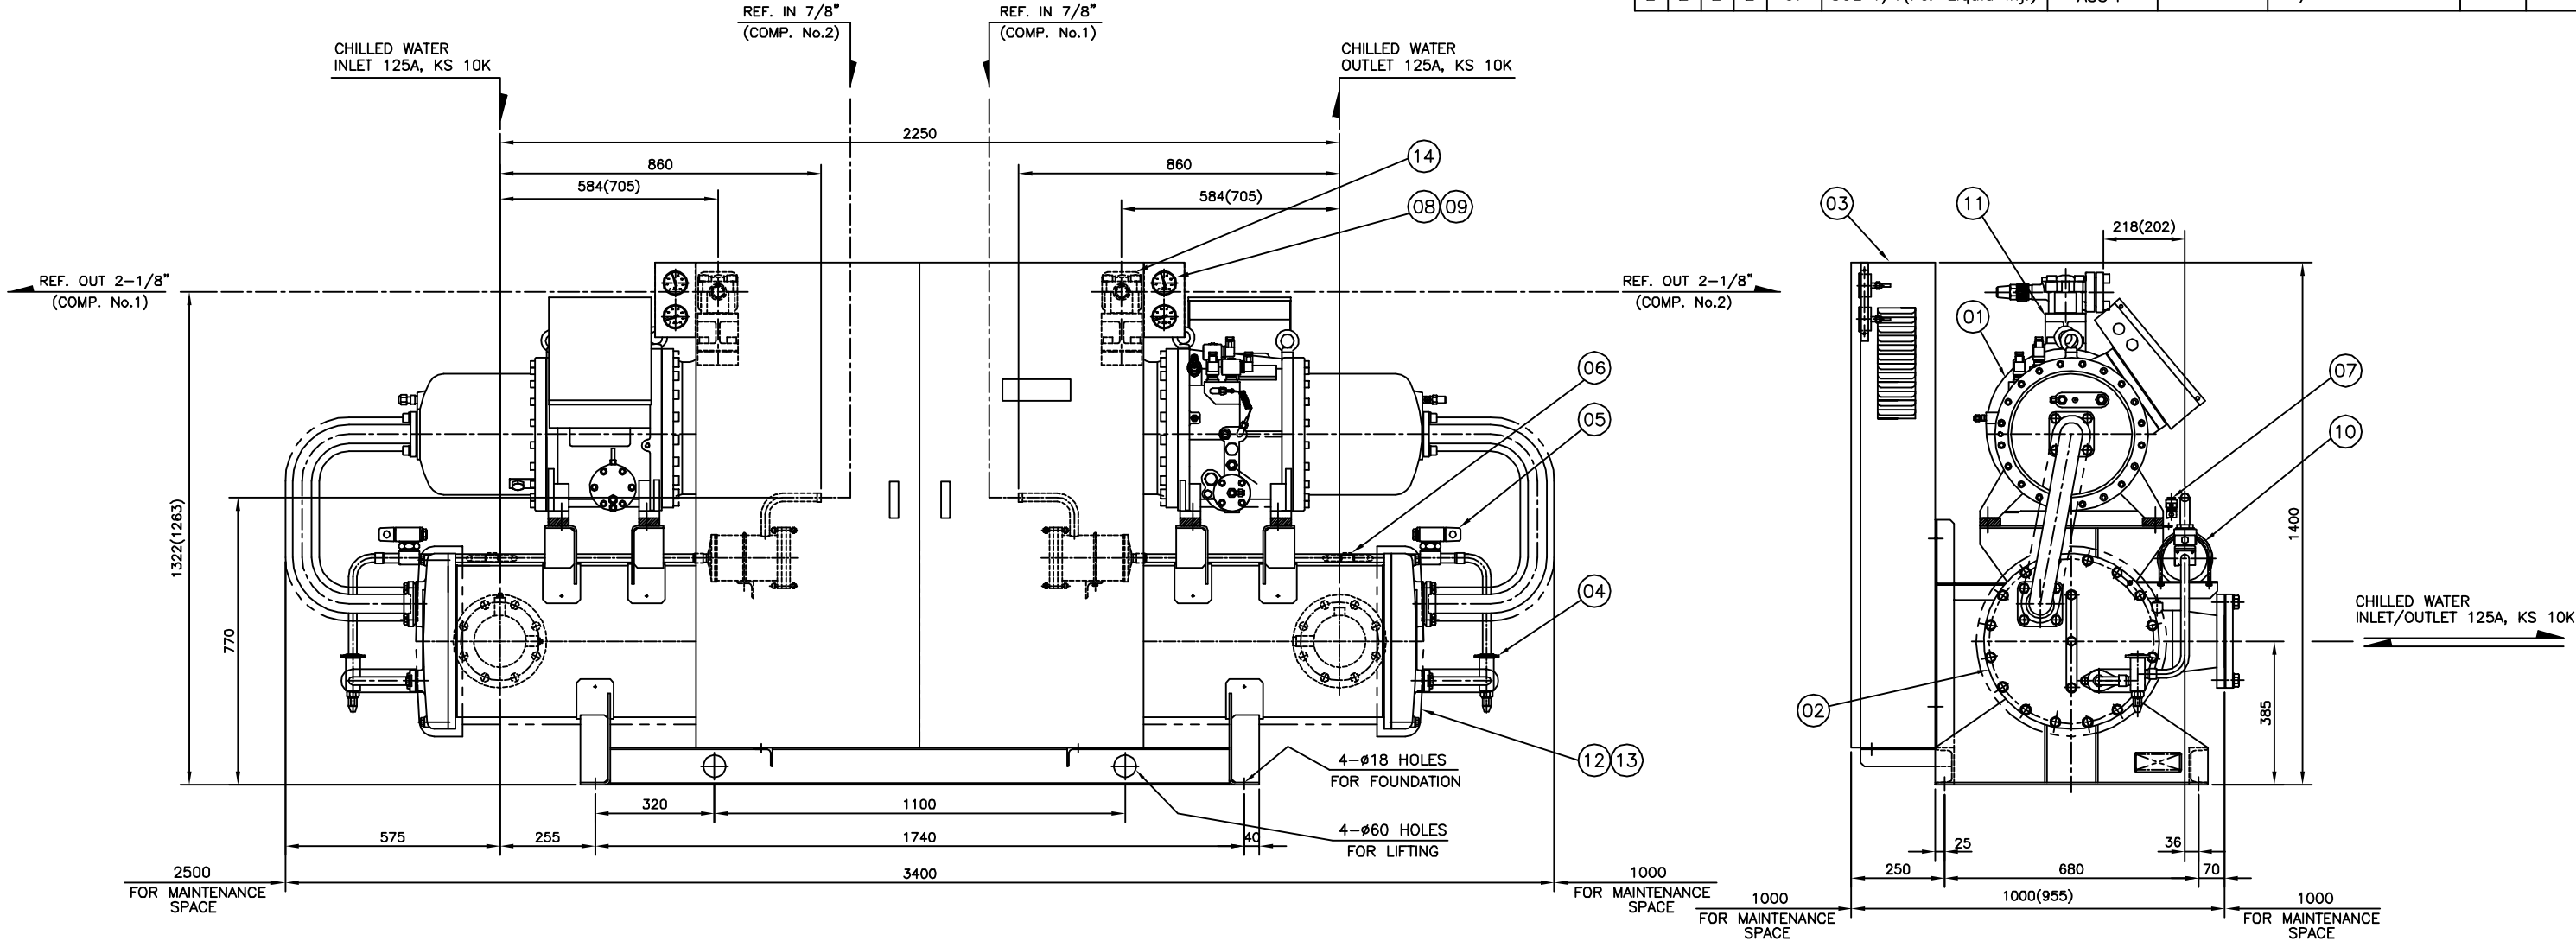

NOTES

1. MAXIMUM OPERATION WATER PRESSURE: 0.8MPaG
2. PLEASE ARRANGE ENOUGH SPACE FOR MAINTENANCE AROUND THE CHILLER.
3. THE "L", "P" TYPE MODELS ARE THOSE OF UNITS FOR LOW TEMPERATURE.
4. THE LEFT COMPRESSOR IS NO.1 IN THE FRONT VIEW.
5. THE DIMENSION IN () ARE THOSE OF SR-A100G(L,F,P)A3
6. THERE IS A DIFFERENCE OF COMPRESSOR'S OUTWARD SHAPE IN CASE OF SR-A100G(L,F,P)A3.

TOLERANCES UNLESS OTHERWISE SPECIFIED		PRODUCT NAME AIR COOLED SCREW WATER CHILLER				TITLE OUTLINE DRAWING (SPLIT TYPE)			
S	MODEL								
	DWN. BY	DESIGNED BY	CHKED. BY	APPD.		THIRD ANGLE PROJECTION	SCALE 1 : 15	UNIT : mm	
		J.B.KIM	S.M.LEE	I.S.JEONG		REFERENCE DRW. NO.			
		2018.07.13	2018.07.16	2018.07.17					
						DRAWING NO.	RAS304595		Rev. 0